


Tefzel™ ETFE 750

Fluoroplastic Resin

200 °C (392 °F) Appliance Wire Insulation

Product Information

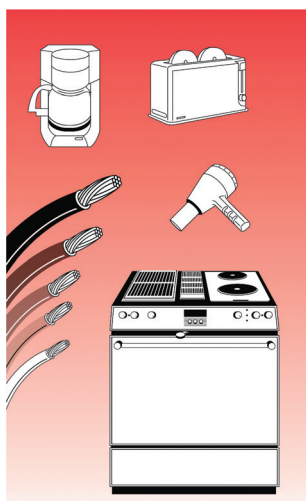

Tefzel™ fluoroplastic resin, a close relative of Teflon™ fluoroplastic resin, was introduced in 1972. It has been used to insulate many millions of feet of cable for aircraft and other aerospace vehicles, rapid transit cars, computers, automobiles, factories, heating piping systems, and nuclear power plants. Now, a special grade of Tefzel™ resin is available to provide this proven performance for 200 °C (392 °F) appliance wire.

UL and CSA Ratings

UL Subject 758 and CSA 210 rated at 200 °C (392 °F):

- UL Style 10109 for 300V
- UL Style 10086 for 600V

Styles 10109 and 10086 are UL-approved for bare copper conductors at 200 °C (392 °F), as long as the individual strand diameter is 15 mil and larger.

Advantages of Tefzel™ ETFE 750

- Easily stripped and terminated
- Unlike SF2 and SF1, it is so tough it doesn't need a protective glass braid. Eliminating the glass braid means:
 - No irritating glass fibers
 - No glass strands to make terminations unreliable
 - Less stripping die wear
 - No braid to damage; thus, spoiling wire
 - No lacquers to smoke, crack, or turn brown with heat aging
- Superior fire resistance, thermal stability, and resistance to aging
- Colorable, printable, and strippable
- A pure polymer; not a compound with inconsistent composition and performance

Cost-Effectiveness

- Single thin-wall extrusion, 40% smaller OD than SF2
- Compatible with bare copper conductor per UL requirement; expensive plated conductor not required

Tefzel™ ETFE 750 vs. Other Grades of Tefzel™ ETFE

- Tefzel™ ETFE 750 has 200 °C (392 °F) thermal rating for appliance wire, while all other grades are lower.
- Tefzel™ ETFE 750 is more flexible than the other grades; for example, flexural modulus for Tefzel™ ETFE 750 is 641.1 MPa (93,000 psi) vs. 1,171.9 MPa (170,000 psi) for Tefzel™ ETFE 200.

Performance Test Results

Cold Bend Test (4 hr at -35 °C [-31 °F])	No cracks
Flexibility After All Oven Aging	No cracks
Conductor Corrosion After All Oven Aging	None
Impact (15 mil)	2 ft lb
Insulation Resistance (UL62)	43,000 ohm·10 ⁶
Horizontal Flame Test (UL62)	Complies
Vertical Flame Test (UL62)	Complies

Other Properties of Tefzel™ ETFE 750

Flexural Modulus (ASTM D790)	641.1 MPa (93,000 psi)
Specific Gravity (ASTM D792)	1.75–1.79
MIT Flex Life	120,000

Temperature	Tensile Strength (ASTM D1708)	Elongation
23 °C (73 °F)	37.9 MPa (5,500 psi)	300%
140 °C (284 °F)	11.4 MPa (1,650 psi)	600%
160 °C (320 °F)	8.6 MPa (1,250 psi)	650%
180 °C (356 °F)	6.2 MPa (900 psi)	600%
200 °C (392 °F)	3.4 MPa (500 psi)	600%

Tefzel™ ETFE 750 meets the requirements of ASTM D3159, Type II, Grade 1


Wire Harness Manufacturing Tips

- Stripping: Use automated or manual machines with stripping die blades or with radial V-blades.
- Termination: AMP Inc. has designed Faston® terminals sized especially for Tefzel™ ETFE 750. Part numbers: 61375-1 tin-plated brass (cold side) 63688-1 nickel-plated steel (hot side) Terminals designed for silicone-coated wire can also be used.
- Hot Stamp Printing: Use printing foils designed for Tefzel™ resin, such as Kingsley Machine Inc. K-520 foil. Use temperatures between 163 °C (325 °F) and 204 °C (400 °F) with moderate dwell and pressure.
- Inks: Use inks recommended specifically for Tefzel™ resin. These are obtainable from many sources, including:




Gem Gravure	Formulabs
Colorant AB	Standard T Chemical
American Can Co.	
- Packaging: To prevent wire-curl and its associated handling problems, request put-ups in drums or spools with large diameter barrels (cores).

Tefzel™ ETFE 750—UL Thermal Studies, Style 10086—Exposure Temperature 210 °C (410 °F)

Tensile Strength, T_B

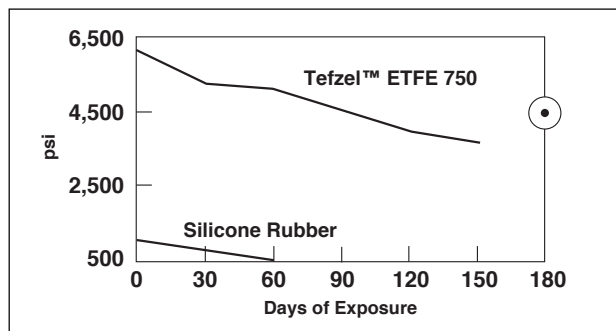


Elongation, E_B

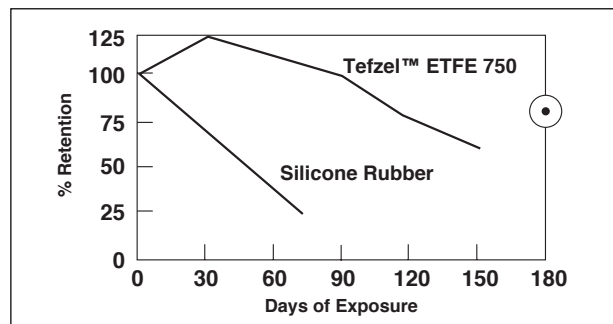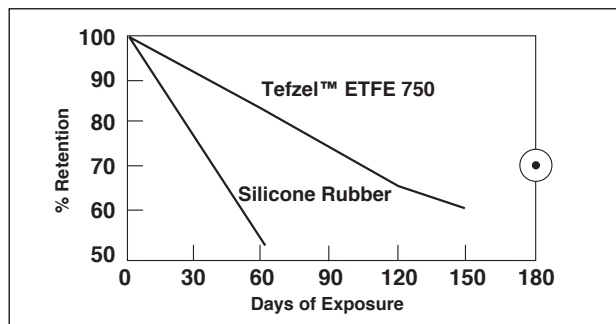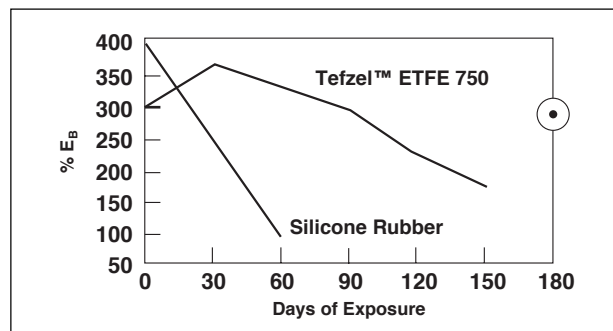




Silicone rubber—literature value 180-day data—Chemours tests

Tefzel™ ETFE 750—UL Thermal Studies, Style 10086—Exposure Temperature 232 °C (450° F), 7 Days

Tensile Strength, T_B

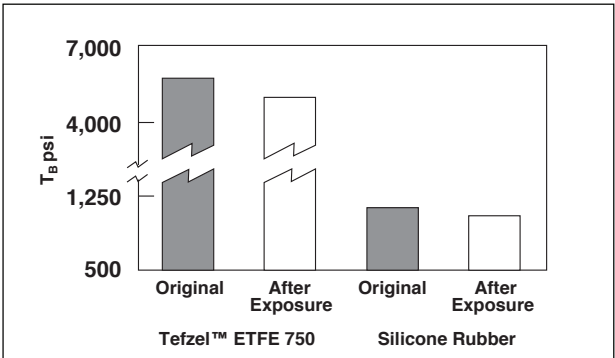


Elongation, E_B

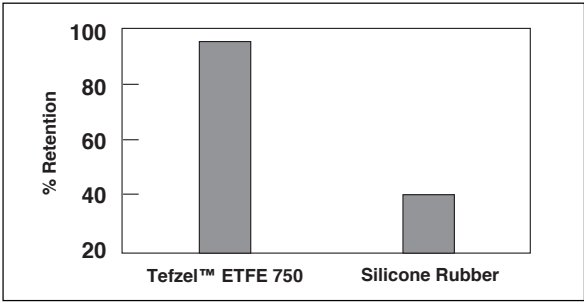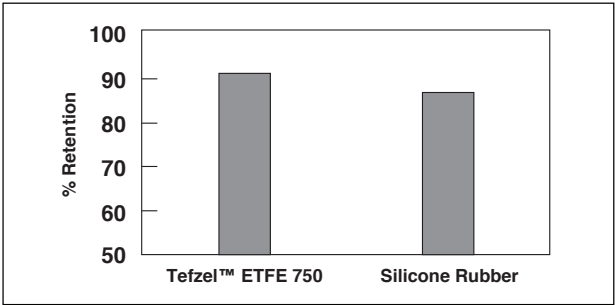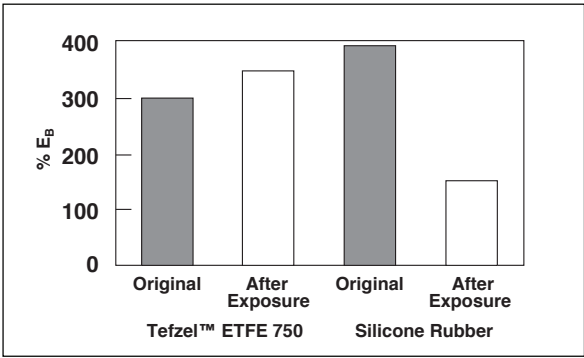

Tefzel™ ETFE 750—UL Thermal Studies, Style 10086—Dielectric Strength

Exposure Temperature, 210 °C (410 °F)

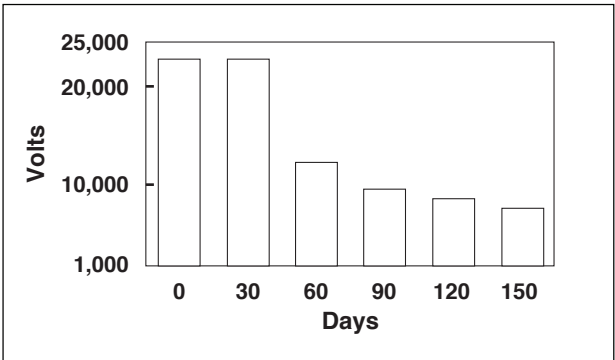

Exposure Temperature, 232 °C (450 °F)

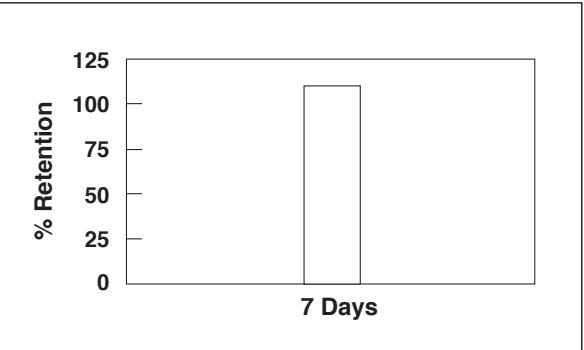
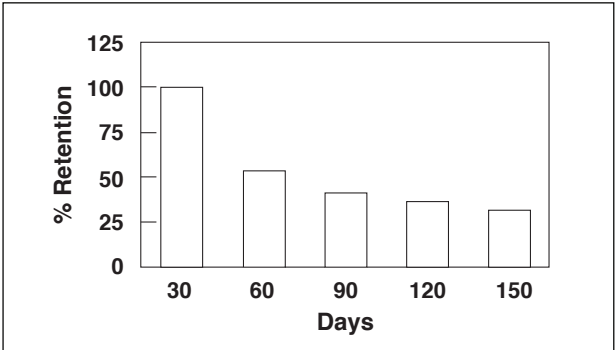
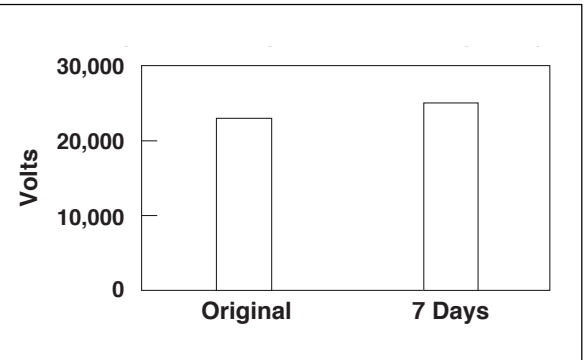


Table 1. Test Results for 18 Gauge Appliance Wire Construction with Various Insulation

Wire	Voltage	Nominal Insulation Thk., mm (mil)	Deformation, % 232 °C (450 °F), 1 hr, 1 kg Load UL-1581 ^a	Crush, lb UL-44	Abrasion, Cycles kg Load, 0.026 ² Needle GE Scrape Abrader	Linear Coefficient of Expansion ^b cc/sec/°C
UL-10086 (TFZ 750)	600	0.254 (10)	95	1,172	3,625	—
PVC	600	0.813 (32)	—	775	2,160	—
XLPE 125 °C (257 °F)	600	0.813 (32)	—	886	2,070	11.5 x 10 ⁻⁴
XLPE 150 °C (302 °F)	600	0.813 (32)	—	810	1,925	—
SF2	600	0.813 (32) + glass braid	98	1,248	85 ^c	8.6 x 10 ⁻⁴
UL-1330 (FEP)	600	0.533 (21)	98	1,926	3,290	—
UL-1332 (FEP)	300	0.330 (13)	97	973	2,670	—
UL-10109 (TFZ 750)	300	0.152 (6)	98	993	2,960	13–14 x 10 ⁻⁵

^a UL-1581 requires 500 g load^b Published data^c Braid removed**HOW TO USE THE TEZFEL™ BRAND NAME WITH YOUR PRODUCT**

Tefzel™ is a registered trademark of Chemours for its brand of ETFE fluoroplastic resins. The Tefzel™ brand name is licensed by Chemours in association with approved applications. Without a trademark license, customers may not identify their product with the Tefzel™ brand name as Chemours does not sell such offerings with the Tefzel™ trademark. Unlicensed customers may refer to the Chemours product offering with only the Chemours name and product code number descriptor as Chemours sells its product offerings. There are no fair use rights or exhaustion of rights to use the Tefzel™ trademark from buying from Chemours, a Chemours customer or a distributor without a trademark license from Chemours.

If you are interested in applying for a trademark licensing agreement for the Tefzel™ brand, please visit teflon.com/license

CAUTION: Do not use Chemours materials in medical applications involving permanent implantation in the human body or contact with bodily fluids or tissues, unless the material has been provided from Chemours under a written contract that is consistent with Chemours policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your Chemours representative. You may also visit www.teflon.com/industrial to download a copy of the "Chemours POLICY Regarding Medical Applications" and "Chemours CAUTION Regarding Medical Applications." For medical emergencies, spills, or other critical situations, call (866) 595-1473 within the United States. For those outside of the United States, call (302) 773-2000.

The information set forth herein is furnished free of charge and based on technical data that Chemours believes to be reliable. It is intended for use by persons having technical skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Because conditions of product use are outside our control, Chemours makes no warranties, express or implied, and assumes no liability in connection with any use of this information. As with any material, evaluation of any compound under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate under or a recommendation to infringe any patents.

NO PART OF THIS MATERIAL MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS ELECTRONIC, MECHANICAL, PHOTOCOPYING, RECORDING OR OTHERWISE WITHOUT THE PRIOR WRITTEN PERMISSION OF CHEMOURS.

For more information, visit teflon.com/tefzel

For sales and technical support contacts, visit teflon.com/industrialglobalsupport

© 2015 The Chemours Company FC, LLC. Tefzel™, Teflon™, and any associated logos, are trademarks or copyrights of The Chemours Company FC, LLC. Chemours™ and the Chemours Logo are trademarks of The Chemours Company.

Replaces: K-27023

C-10190 (12/15)